

CLIVUS MULTRUM 14 & 40

SPLIT CONTINUOUS COMPOSTING TOILET



Our Largest "Set & Forget" Composting Toilets

The CM14 and CM40 are revolutionary continuous composting systems designed for high-traffic environments, from bustling larger households to busy public facilities.

With the unique capability to support two separate toilet pedestals, these models offer unparalleled capacity and convenience.

The CM14 offers the lowest profile of all our continuous toilets. When partially buried, it requires only 475mm of underfloor clearance. Whereas the CM40 offers the largest capacity, requiring even less maintenance.



Waterless



Low Maintenance



Sustainable



Odourless

How It Works

Engineered to maintain optimal aerobic conditions, it naturally transforms waste into nutrient-rich compost – no plumbing, water, or costly excavation required.

Proudly Australian Made

Certified to the highest Australian and New Zealand standards – quality you can trust, made right here in Australia.



Fan
Encourages airflow to bring oxygen to the microorganisms and to evaporate excess liquids.


Maintenance Door
For inspection and to level out the pile with a rake.

Compost Door

Can be buried up to this level

Baffle
The baffle separates the composting pile from the access door so you only handle composted material – never fresh waste.

Leachate Drain or Zero Discharge
Drain excess liquid into the ground or recycle it without discharge.

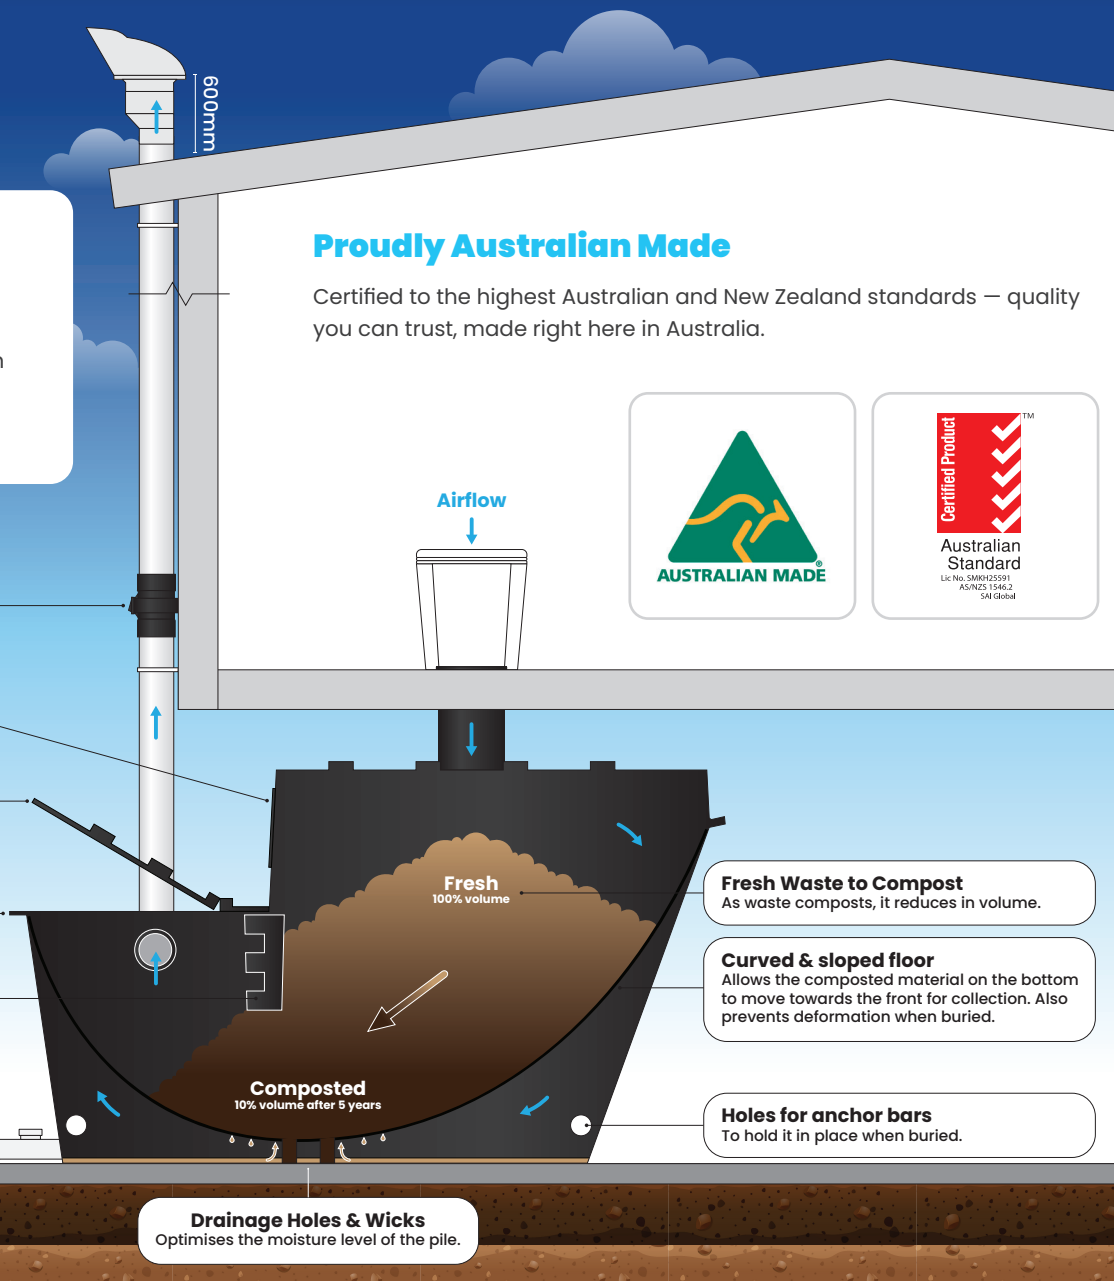

Fresh Waste to Compost
As waste composts, it reduces in volume.

Curved & sloped floor
Allows the composted material on the bottom to move towards the front for collection. Also prevents deformation when buried.

Holes for anchor bars
To hold it in place when buried.

Drainage Holes & Wicks
Optimises the moisture level of the pile.

SPECIFICATIONS	CM14	CM40
Capacity	10-20 people	28-55 people
Approx. Uses	Daily: 38 visits Annually: 14,000 visits	Daily: 110 visits Annually: 40,000 visits
Volume	1400L	2500L
Dimensions	2135L x 1740W x 1200H mm	2135L x 1740W x 1900H mm
Clearance - If partially buried	Min. 540mm underfloor	Min. 1250mm underfloor
Clearance - If above ground	Min. 1300mm underfloor	Min. 2000mm underfloor
Bury depth	Max. 750mm	Max. 750mm
Max. Fixtures	2 pedestals + 1 urinal	2 pedestals + 2 urinals
Included kits	Starter pack, vent & drain kit	Starter pack, vent & drain kit
Power	12V 5W Fan	12V 5W Fan
Warranty	10 years for moulded parts	10 years for moulded parts

PEDESTAL OPTIONS



Porcelain Pandora
Perfect for narrow spaces



Porcelain Palisade
Modern, elegant design



Porcelain Pasadero
Urine diverting

HOW TO START



Add a **starter bed** of bulking agent up to the underside of the baffle. Slightly dampen with water.

Recommended:

- Pine woodshavings
- Hemp bedding

Not recommended:

- Fine sawdust
- Cypress, cedar or eucalyptus woodshavings
- Sugar cane mulch




After about 14 days of use or 20 visits, add about a ¼ cup of **microbes** mixed with warm water.

Repeat after 14 days of use or 40 visits.

HOW TO OPERATE

After every **liquid deposit**, simply close the lid.


After every **solid deposit**, do as shown:

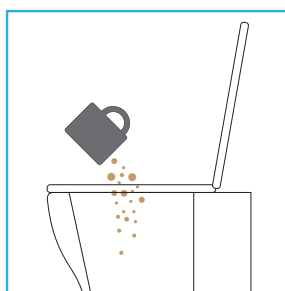

1. Add a generous cup of bulking agent



2. Spray enzyme solution around the pedestal bowl

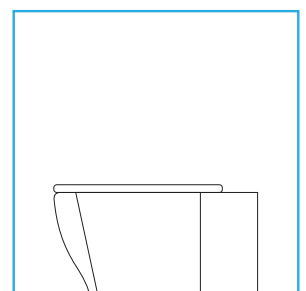

3. Close the lid

Alternatively, for commercial use, you could add a household bucket of bulking agent weekly.