

CLIVUS MULTRUM HIGH PROFILE

SPLIT BATCH COMPOSTING TOILET




Easy to Install and Operate

After number 1s, simply close the lid. After number 2s, just add in a cup of bulking agent, then close the lid.

When one chamber is full, replace it with the next chamber.

Leave the full one to sit in the sun to completely compost.

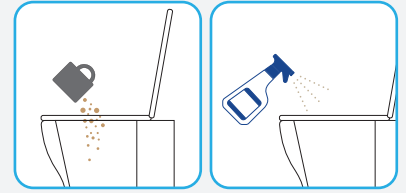


Compost Mixer

A world first in its innovative design, with an in-built compost mixer, increasing volume and efficiency.

Optional Heater Pad

A heater pad can be installed in the bottom of the HP chamber for the cold seasons. The optimum temperature range for composting is 18-45°C. Lower temperatures slow down the composting process.

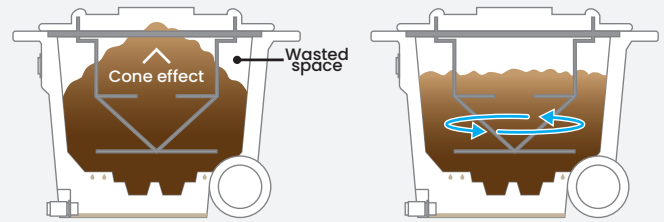

Pedestal Options



Porcelain Pandora
Perfect for narrow spaces




Porcelain Palisade
Modern, elegant design



Porcelain Pasadero
Urine diverting

Specifications

Capacity	Up to 6 full-time users
Volume	2x 120L chambers
Power usage	12V 5W Fan
Clearance	Min. 750mm underfloor
Dimensions	930mm L x 760mm W x 700mm H
Chute length	550mm
Material	UV stabilised LDPE
Incl. Starter Park	Bulking agent; microbes; enzyme concentrate; spray bottle
Extras	Extra chambers, a vent kit and a drain kit can be purchased separately
Warranty	10 years (rotomoulded components)

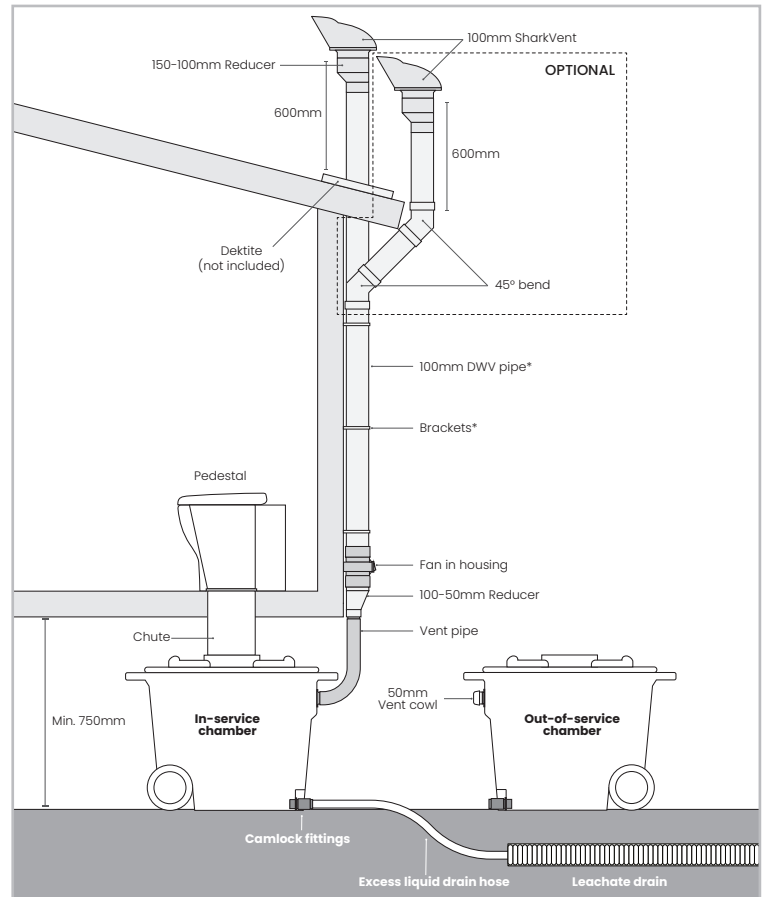

Waterless



Low Maintenance



Sustainable



Odourless

